

FIG. 1a
PRIOR ART

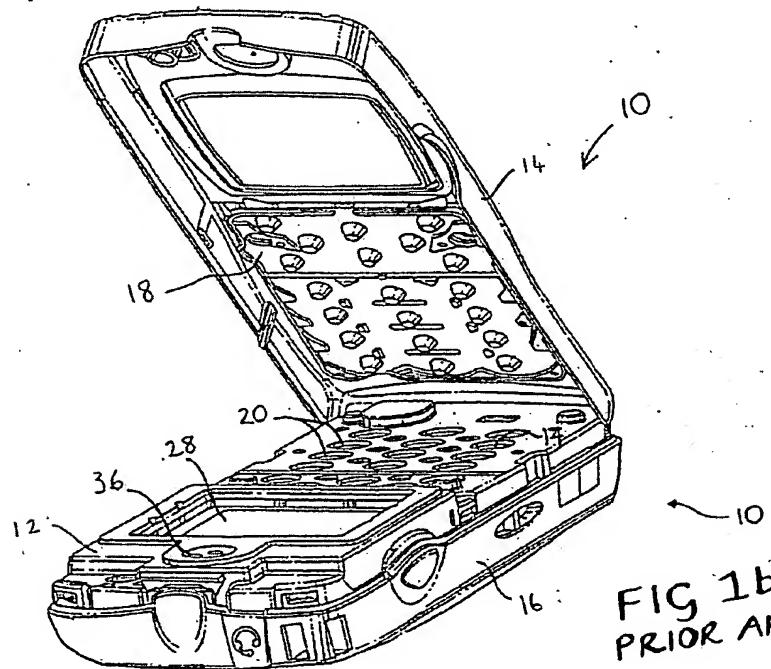


FIG 1b
PRIOR ART

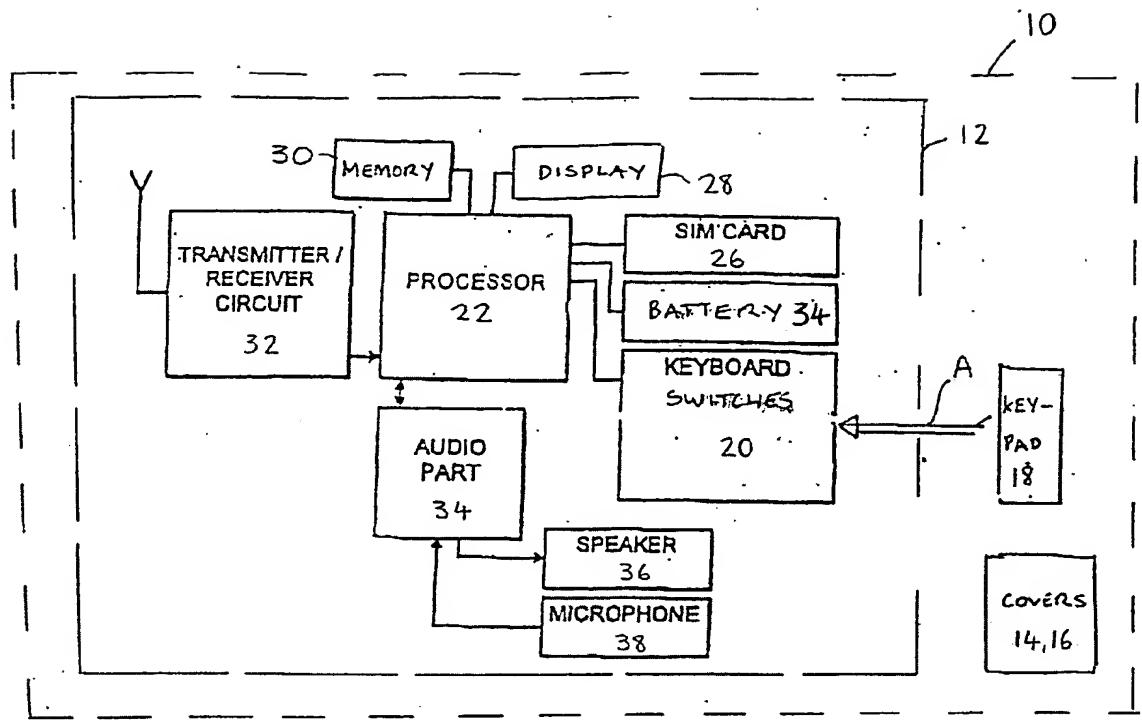


FIG 2 PRIOR ART

BEST AVAILABLE COPY

FIG 3a


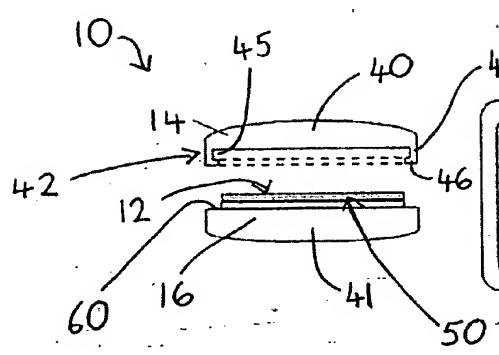


FIG 3b

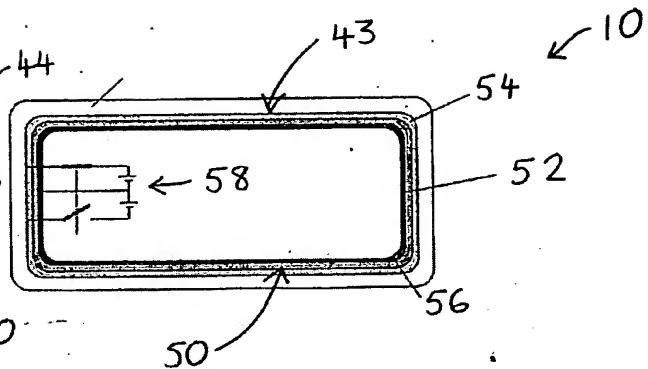

A diagram of a cylindrical component. A horizontal slot is visible on the left side. A central horizontal rod is positioned within the cylinder. The number '14' is written above the top edge of the cylinder. The number '43' is written on the left side, pointing to the slot. The number '16' is written below the slot. The number '41' is written on the right side, pointing to the central rod. The number '50' is written on the right side, pointing to the right edge of the cylinder.

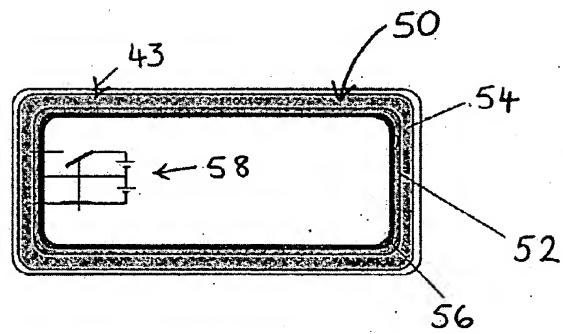


FIG 4a

FIG 4b

BEST AVAILABLE COPY

FIG 5a




FIG 5b


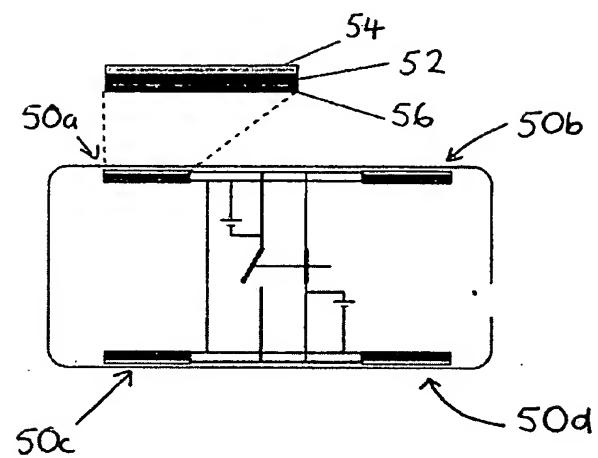


FIG 6a

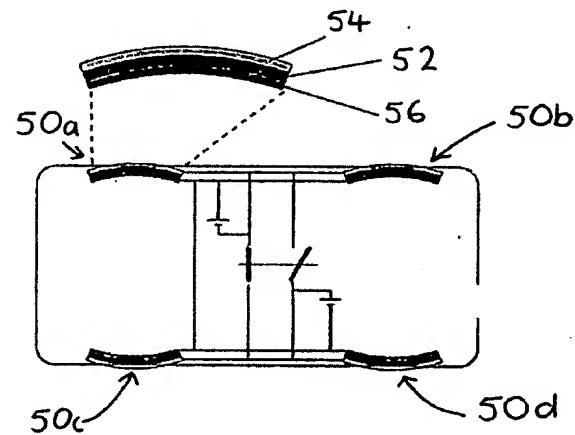


FIG 6b

BEST AVAILABLE COPY